

HC/49US (AT49) SMD LOW PROFILE CRYSTAL



11.5 x 4.7 x 4.2 mm

ABLS



RoHS Compliant

Moisture Sensitivity Level (MSL) – This product is Hermetically Sealed and not Moisture Sensitive - MSL = N/A: Not Applicable

FEATURES:

- Suitable for RoHS reflow
- Available for tight stability & extended temperature range

APPLICATIONS:

- Computers, Modems, Microprocessors
- Wireless Applications

STANDARD SPECIFICATIONS:


| PARAMETERS                                                  |                                                                                                                                                                                                               |
|-------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ABRACON P/N                                                 | ABLS Series                                                                                                                                                                                                   |
| Frequency                                                   | 3.579545 MHz to 75 MHz                                                                                                                                                                                        |
| Operation Mode                                              | AT cut (Fundamental or 3rd OT) or BT cut (See options)<br>3.579545MHz - 24.0MHz (Fundamental: Standard)<br>24.01MHz - 75.00MHz (3rd- Overtone: Standard)<br>24.01MHz - 50.00MHz (Fund. AT or BT: See options) |
| Operating Temperature                                       | 0°C to + 70°C (see options)                                                                                                                                                                                   |
| Storage Temperature                                         | - 55°C to + 125° C                                                                                                                                                                                            |
| Frequency Tolerance at +25°C                                | ± 50 ppm max. (see options)                                                                                                                                                                                   |
| Frequency Stability over the Operating Temp. (Ref to +25°C) | ± 50 ppm max. (see options)                                                                                                                                                                                   |
| Equivalent Series Resistance                                | See Table 1                                                                                                                                                                                                   |
| Shunt Capacitance C <sub>0</sub>                            | 7pF max.                                                                                                                                                                                                      |
| Load Capacitance C <sub>L</sub>                             | 18pF (see options)                                                                                                                                                                                            |
| Drive Level                                                 | 1 mW max., 100 µW typical                                                                                                                                                                                     |
| Aging at 25°C (first year)                                  | ± 5ppm max.                                                                                                                                                                                                   |
| Insulation Resistance                                       | 500 MΩ min at 100Vdc ± 15V                                                                                                                                                                                    |
| Spurious Responses                                          | -3dB max.                                                                                                                                                                                                     |
| Drive level dependency (DLD)                                | from 1 µW to 500 µW (minimum 7 points tested)                                                                                                                                                                 |

TABLE 1: STANDARD ESR

| FREQUENCY (MHz)          | ESR (Ω) MAX |
|--------------------------|-------------|
| 3.579 - 4.999 (Fund.)    | 180         |
| 5.000 - 5.999 (Fund.)    | 120         |
| 6.000 - 7.999 (Fund.)    | 100         |
| 8.000 - 8.999 (Fund.)    | 80          |
| 9.000 - 9.999 (Fund.)    | 60          |
| 10.000 - 15.999 (Fund.)  | 50          |
| 16.000 - 50.000 (Fund.)  | 40          |
| 24.01 - 31.999 (3rd O/T) | 100         |
| 32.000 - 75.00 (3rd O/T) | 80          |

OPTIONS & PART IDENTIFICATION:

(Left blank if standard)

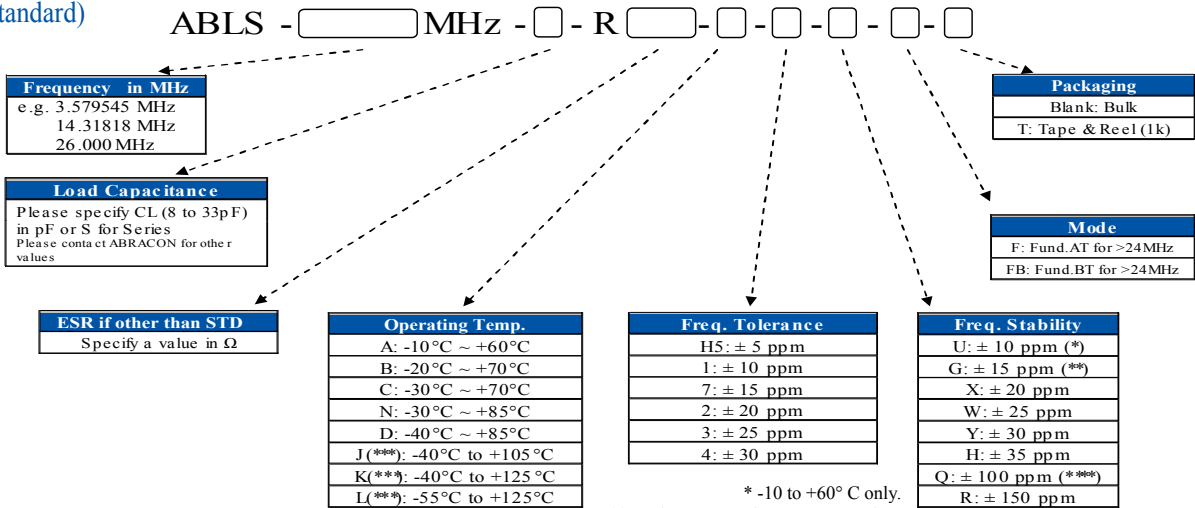

\* -10 to +60° C only.


\*\* Option A, B, and 0 to +70° C only.

\*\*\* Frequency stability ±50ppm, ±100ppm, or ±150ppm only.

Contact ABRACON for tighter frequency stability.

\*\*\*\* For Fundamental BT, frequency stability ± 100ppm max. at -10° C to +60° C only.

ABRACON IS  
ISO9001:2008  
CERTIFIED



ABRACON  
CORPORATION

Visit [www.abracon.com](http://www.abracon.com) for Terms & Conditions of Sale  
30332 Esperanza, Rancho Santa Margarita, California  
92688 tel 949-546-8000 | fax 949-546-8001 | [www.abracon.com](http://www.abracon.com)

Revised: 02.16.2021

# HC/49US (AT49) SMD LOW PROFILE CRYSTAL




11.5 x 4.7 x 4.2 mm

ABLS




RoHS  
Compliant

## ➤ OUTLINE DRAWING:

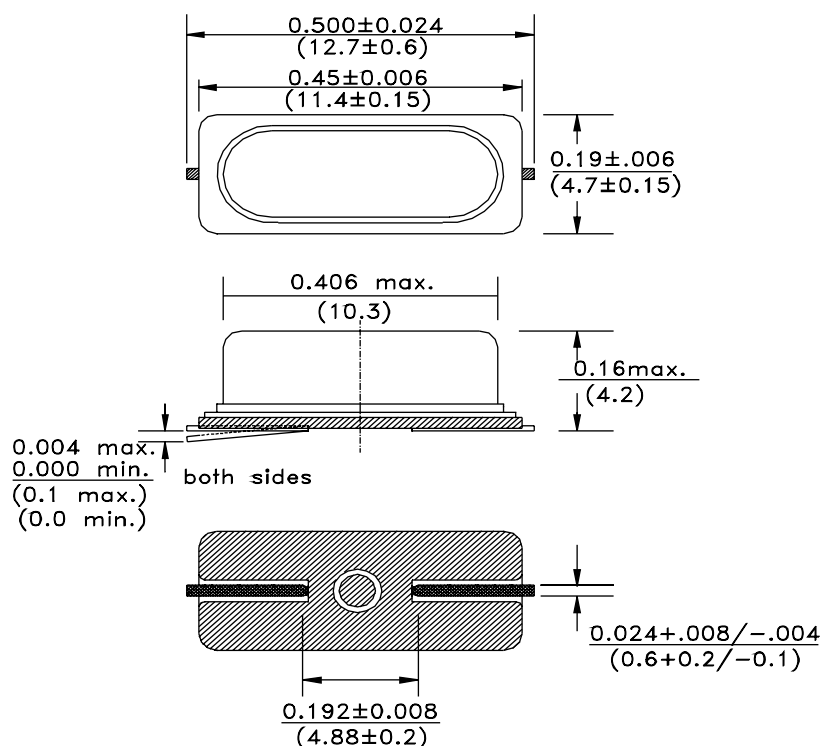


## Recommended land pattern

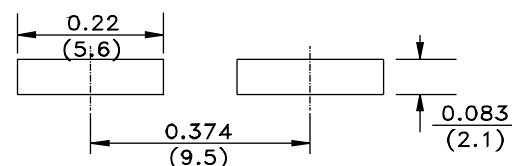


Dimensions: Inches (mm)

## ➤ TAPE & REEL:

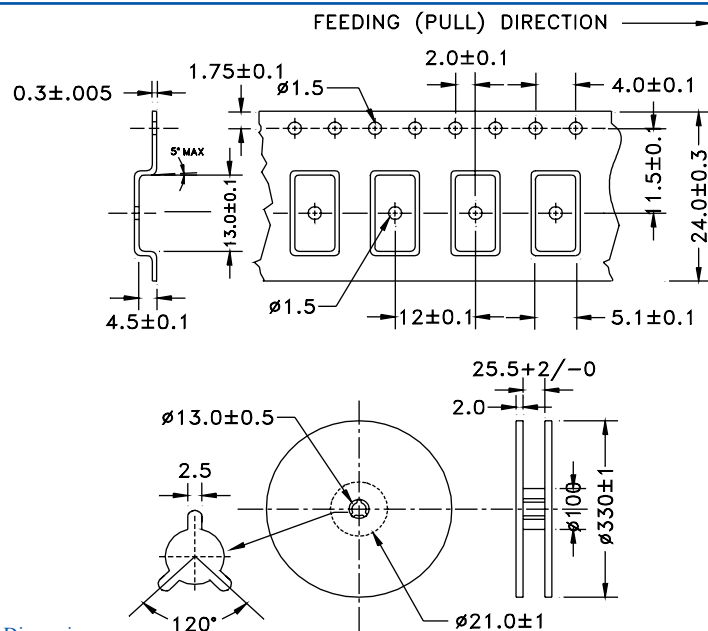

Dimensions: mm

## ➤ REFLOW PROFILE:

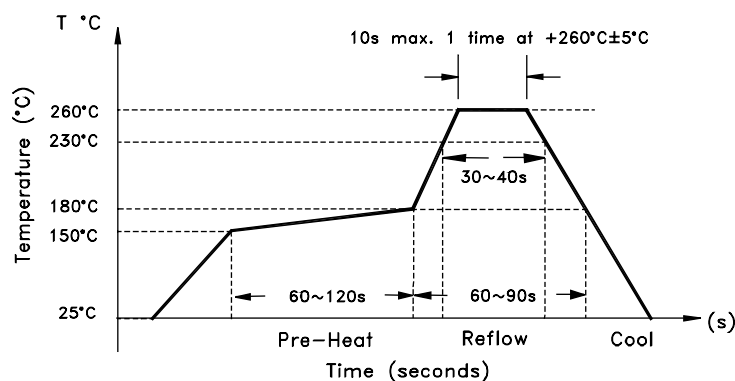

**Need a test socket for the ABLS series? To view compatible PRECISION TEST & BURN-IN SOCKETS for these parts, click here**[P/N: AXS-1147-02-02](#)

**ATTENTION:** Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS  
ISO9001:2008  
CERTIFIED



**ABRACON  
CORPORATION**

Visit [www.abracon.com](http://www.abracon.com) for Terms & Conditions of Sale **Revised: 02.16.2021**  
30332 Esperanza, Rancho Santa Margarita, California  
92688 tel 949-546-8000 | fax 949-546-8001 | [www.abracon.com](http://www.abracon.com)