

# 产品规格书

## PRODUCT SPECIFICATION S

Customer Model N o: -----TFT-LCM

Module N O: JUN7035PT-18-----

Date: 2016-04-20  
-----

Version: V.0  
-----

Approved by PJM	Reviewed by QA	Reviewed by RD
--------------------	----------------	-------------------

Huang Junxi	Shi Changsheng	Huang Shiyi
-------------	----------------	-------------

## **REVISION RECORD**

<b><u>REV NO</u></b>	<b><u>REV DATE</u></b>	<b><u>PAGE</u></b>	<b><u>CONTENTS</u></b>	<b><u>ISSUER</u></b>
<b>1.0</b>	<b>2015-07-07</b>	<b>24</b>	<b>First Release</b>	Nieshulan

# TABLE OF CONTENT

- GENERAL SPECIFICATIONS
- ABSOLUTE MAXIMUM RATINGS
- ELECTRICAL CHARACTERISTICS
- DIMENSIONAL DRAWING
- INTERFACE PIN CONNECTIONS
- TIMING CHARACTERISTICS OF INPUT SIGNAL
- ELECTRO-OPTICAL CHARACTERISTICS
- RELIABILITY
- INSPECTION STANDARDS
- PACKING DRAWING
- HANDLING PRECAUTION

## 1.0 General Specifications

JUN7035PT-18 *color active matrix LCD module*

**incorporating amorphous silicon TFT (Thin Film Transistor). It is composed of a color TFT-LCD panel, driver IC, FPC and a back light unit. The module display area contains 800\*480 pixels. This product accords with RoHS environmental criterion.**

<b>Item</b>	<b>Contents</b>	<b>Unit</b>
Viewing direction	6:00	O' Clock
Number of Pixels	800(RGB) x480	/
Number of color	16.7M	/
Display Mode	Normally White	/
Backlight Type	3*6chips white LED	/
Interface Type	Parallel RGB 24-bit	/
LCM Luminance	220(typ)	cd/m2
Response Time (Tr+Tf)	25ms (typ)	
Contrast Ratio	200(typ)	
Input Voltage	3.3	V

## 2.0 ABSOLUTE MAXIMUM RATINGS

The following are maximum values which, if exceeded may cause faulty operation or damage to the unit

<b>Item</b>	<b>Symbol</b>	<b>Min</b>	<b>Max</b>	<b>Unit</b>	<b>Note</b>
<b>Digital Supply Voltage</b>	<b>VDD VDD-LVDS</b>	<b>-0.3</b>	<b>5</b>	<b>V</b>	
<b>Analog Supply Voltage</b>	<b>AVDD</b>	<b>-0.5</b>	<b>15</b>	<b>V</b>	
<b>Gate On Voltage</b>	<b>VGH</b>	<b>-0.3</b>	<b>40</b>	<b>V</b>	

Gate Off Voltage	VGL	-20	0.3	V	
Gate On-Gate Off Voltage	VGH-VGL	-0.3	40	V	

Note :If users use the product out off the environment operation range (temperature and humidity ,it will have visual quality concerns.

### 3.0 ELECTRICAL CHARACTERISTICS


#### 3.1 Typical Operation Condition

Item	Symbol	Min.	TYP	Max.	Unit	NOTE
Digital Power Supply Voltage For LCD	VDD	3.0	3.3	3.6	V	
Analog Power Supply Voltage	AVDD	8.5	8.7	8.9	V	-
TFT Gate on voltage	VGH	22	23	24	V	
TFT Gate off voltage	VGL	-7.4	-6.8	-6.2	V	
Common Voltage	VCOM	2.2	2.4	2.6	V	
Logic Input Voltage	VIH	0.7*DVDD		DVDD	V	
	VIL	GND		0.3*DVDD	V	

#### 3.2 BACKLIGHT CHARACTERISTICS

Item	Symbol	Min	Typ	Max	Unit	Condition
Forward voltage	Vf	9.0	9.2	10.2	V	If=120mA
Luminance	Lv	200	220	-	cd/m2	If=120mA
Number of LED	--	18			Piece	--
Connection mode	P	3 chips serial *6			--	--

### 4.0 DIMENSIONAL DRAWING

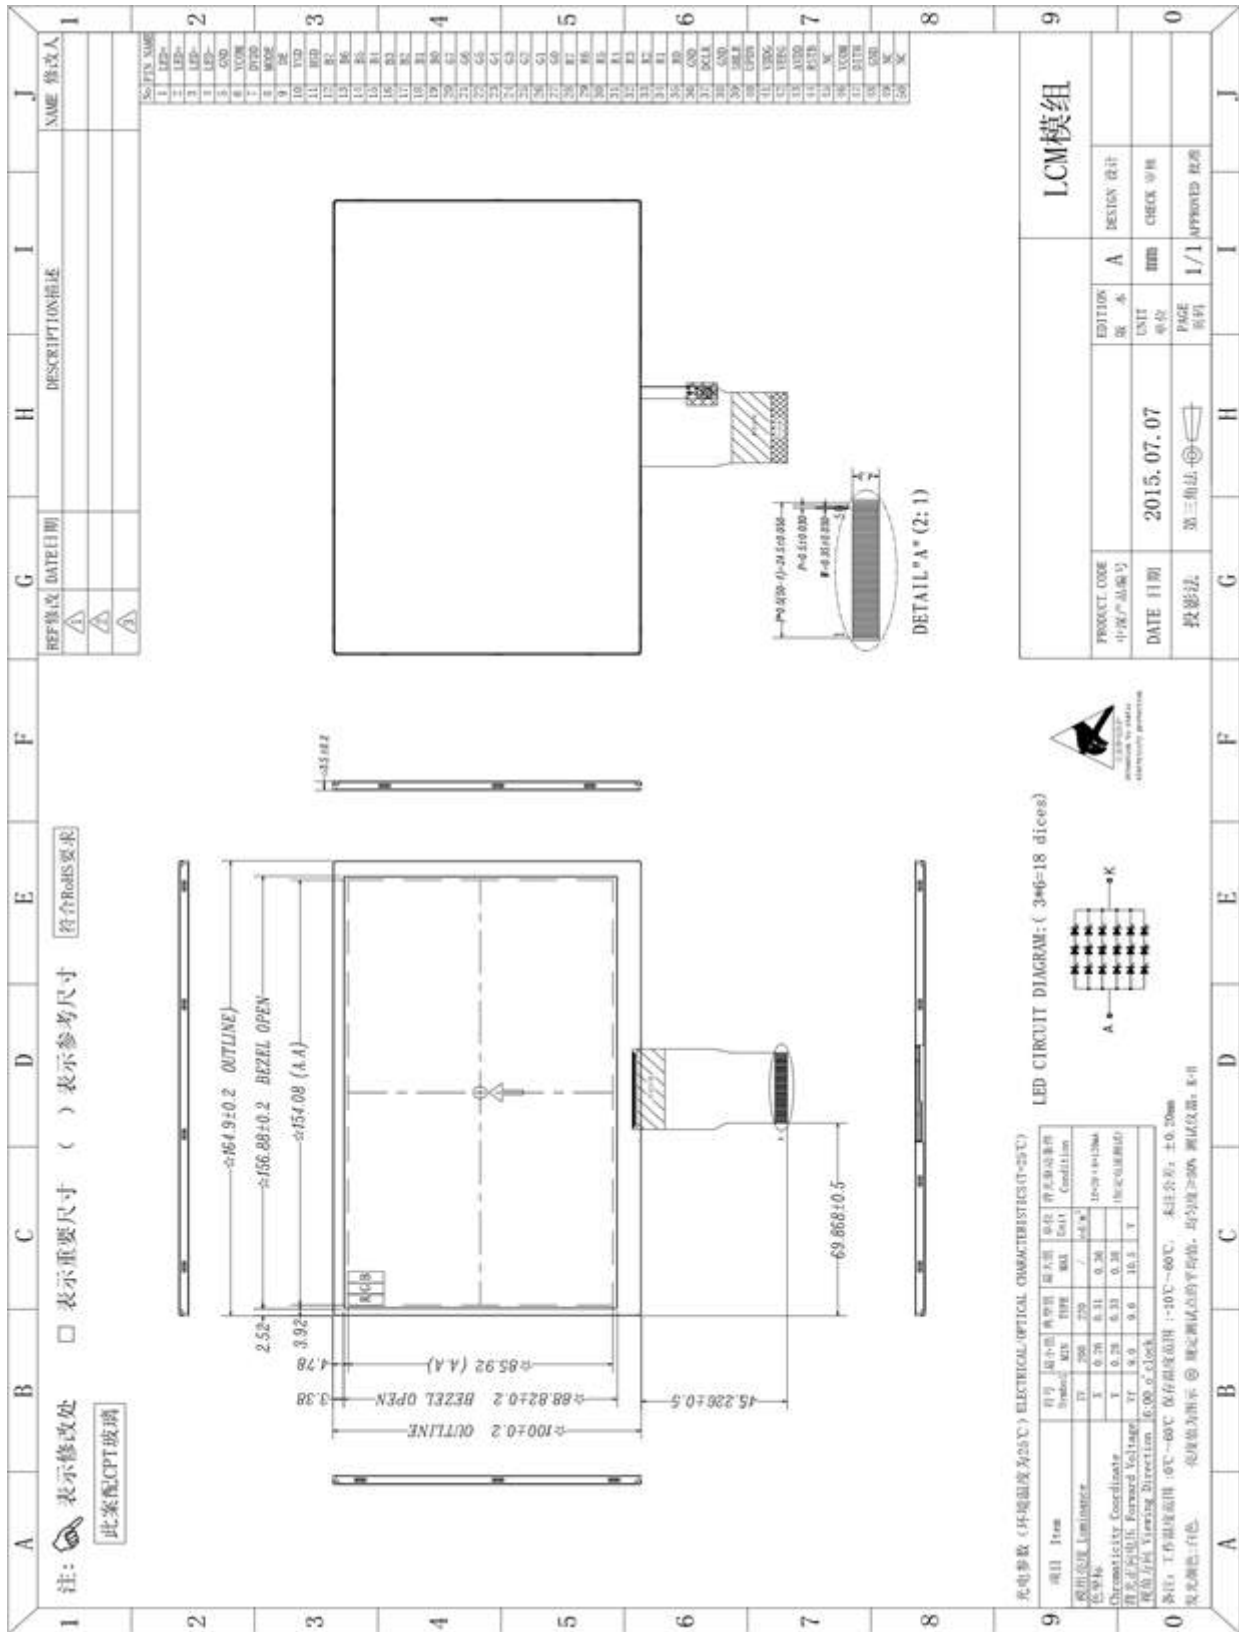

## 5.0 INTERFACE PIN CONNECTIONS

Pin No.	Symbol	Function
1,2	VLED+	Power for LED backlight (Anode)
3,4	VLED-	Power for LED backlight (Cathode)
5	GND	Power ground
6	VCOM	Common Voltage
7	DVDD	Digital Power
8	MODE	DE/SYNC mode select. Normally pull high H: DE mode. L: HSD/VSD mode
9:	DE	Data Enable signal.
10	VSD	Vertical sync input. Negative polarity
11	HSD	Horizontal sync input. Negative polarity
12-19	B7-B0	Blue Data
20-27	G7-G0	Green Data
28-35	R7-R0	Red Data
36	GND	Ground
37	DCLK	Colock signal
38	GND	Display on/off
39	SHLR	Left or Right Display Control
40	UPDN	Up / Down Display Control
41	VDDG	Positive Power for TFT
42	VEEG	Negative Power for TFT
43	AVDD	Analog Power
44	RSTB	Global reset pin. Active low to enter reset state. Suggest to connecting with an RC reset circuit for stability. Normally pull high. (R=10K $\Omega$ , C=1 $\mu$ F)
45	NC	Not connect
46	VCOM	Common Voltage
47	DITH	Dithering setting DITH=" H" 8bit resolution(last 2 bit of input data truncated) DITH=" L" 6bit resolution(default setting)

48	GND	Power ground
49	NC	Not connect
50	NC	Not connect


## 6.0 Timing characteristics

### 6.0. Input Timing Table


	ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT	Note
<b>DE MODE</b>	Dot Clock	1/tCLK	45	51.2	57	MHz	
	DCLK Pulse Duty	Tcwh	40	50	60	%	
	Horizontal Total Time	tH	1324	1344	1364	tCLK	
	Horizontal Effective Time	tHA		1024		tCLK	
	Horizontal Blank Time	tHB	300	320	340	tCLK	
	Vertical Total Time	tV	625	635	645	tH	
	Vertical Effective Time	tVA		600		tH	
<b>SYNC MODE</b>	Horizontal Total Time	TH	1324	1344	1364	tCLK	
	Horizontal Pulse Width	Thpw		20	-	tCLK	thb + thpw = 160DCLK is fixed
	Horizontal Back Porch	Thb		140	-	tCLK	
	Horizontal Front Porch	Thfp	140	160	180	tCLK	
	Horizontal Effective Time	THA		1024		tCLK	
	Vertical Total Time	TV	625	635	645	tH	
	Vertical Pulse Width	Tvpw		3	-	th	tvpw + tvb = 23th is fixed
	Vertical Back Porch	Tvb	-	20	-	th	
Vertical Front Porch	Tvfp	2	12	22	th		
Vertical Valid	Tvd		600		th		

### 6.0.2 Clock and Data Timing Diagram

Parameter	Symbol	Spec.			Unit	Condition
		Min.	Typ.	Max.		
DVDD Power On Slew Rate	TPOR	-	-	20	ms	From 0V to 90% DVDD
RSTB Pulse Width	TRst	50	-	-	us	DCLK=65MHz
DCLK Cycle Time	Tcph	14	-	-	ns	
DCLK Pulse Duty	Tcwh	40	50	60	%	
VSD Setup Time	Tvst	5	-	-	ns	
VSD Hold Time	Tvhd	5	-	-	ns	
HSD Setup Time	Thst	5	-	-	ns	
HSD Hold Time	Thhd	5	-	-	ns	
Data Setup Time	Tdsu	5	-	-	ns	D0[7:0],D1[7:0],D2[7:0] to DCLK
Data Hold Time	Tdhd	5	-	-	ns	D0[7:0],D1[7:0],D2[7:0] to DCLK
DEN Setup Time	Tesu	5	-	-	ns	
DEN Hold Time	Tehd	5	-	-	ns	

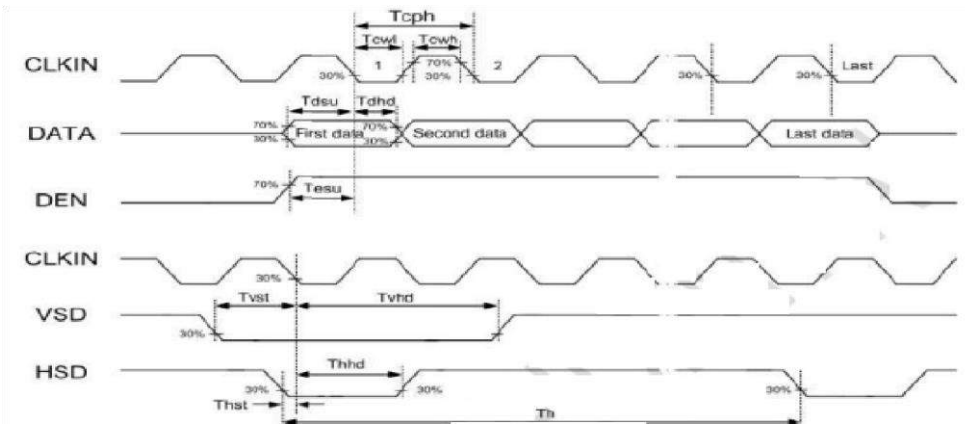


**Vertical timing :**

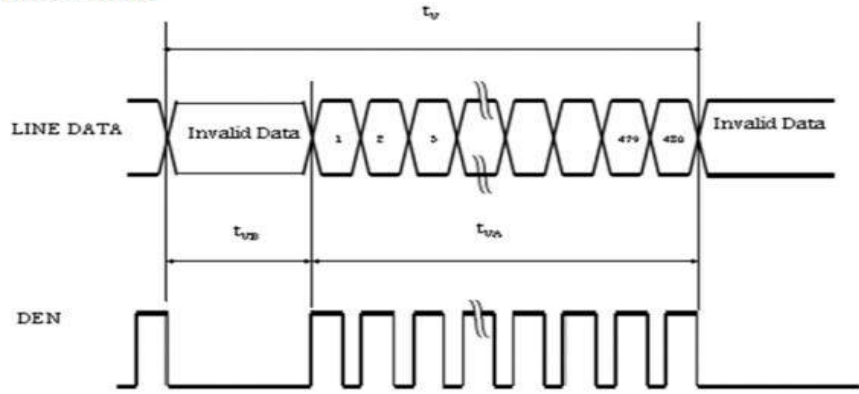


### SYNC Mode

Horizontal timing :

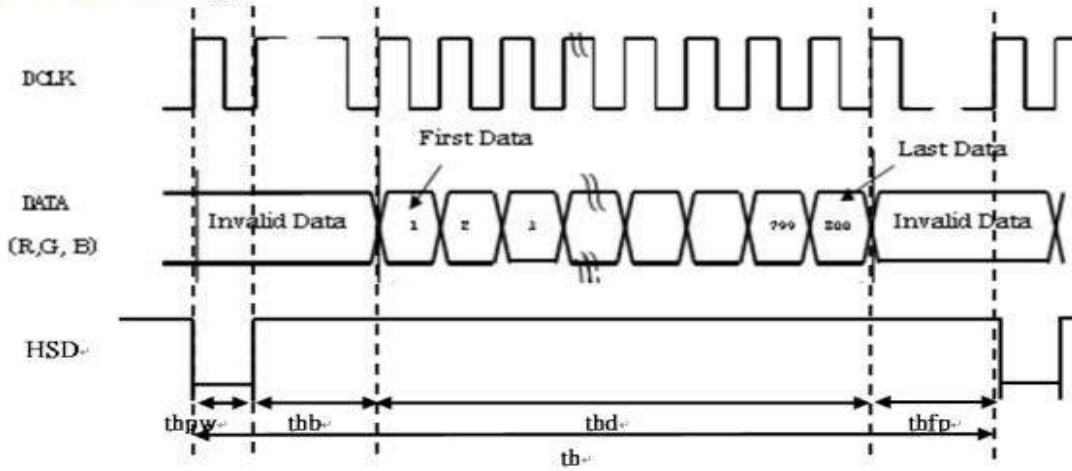


### Data Input Format


Horizontal timing :

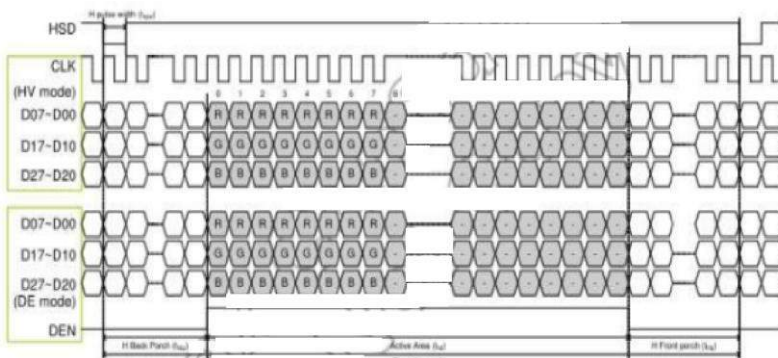

Vertical timing :

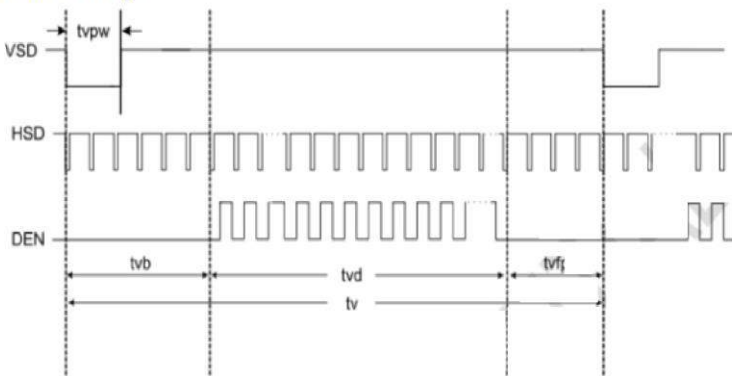


**Vertical timing :**

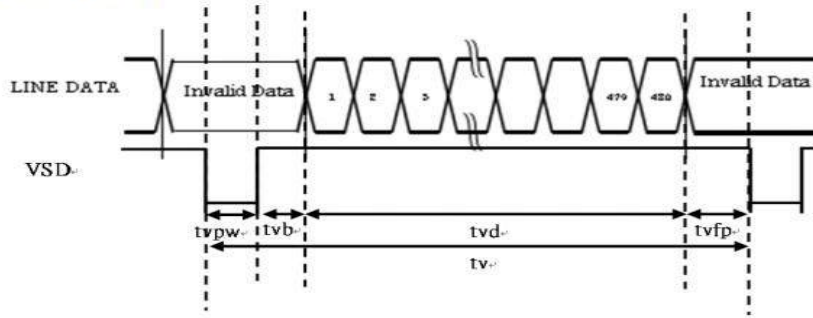

**6.0.3 Power & Signal sequence**

Power On : DVDD → AVDD/VGL → VGH → Video & Logic Signal → Backlight  
 Power Off : Backlight → Video & Logic Signal → VGH → AVDD/VGL → DVDD

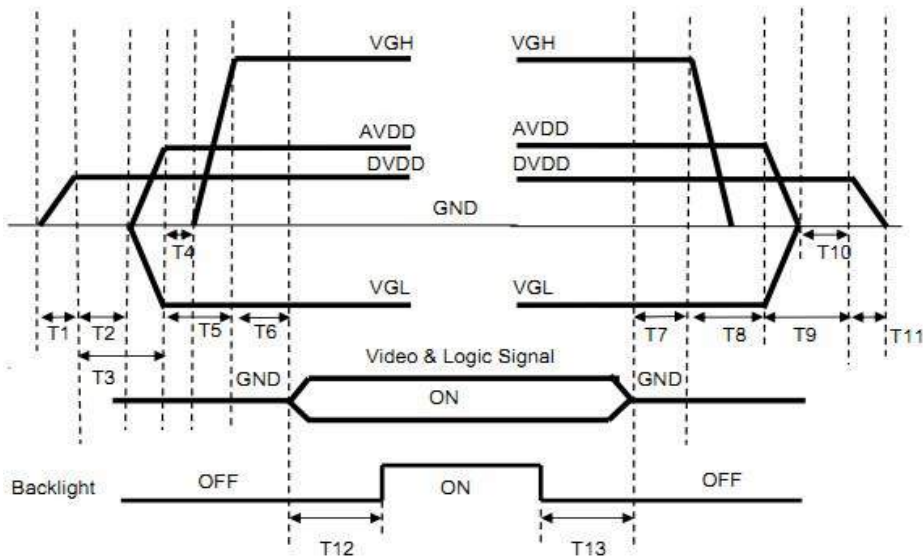

- $0 < T1 \leq 10ms$
- $T2 > 0ms$
- $T3 > 20ms$
- $T4 > 0ms$
- $T5 > 10ms$
- $0 < T6 \leq 10ms$
- $T12 \geq 200ms$
- $T7 > 0ms$
- $T8 > 0ms$
- $T9 > 0ms$
- $T10 > 0ms$
- $0 < T11 \leq 10ms$
- $T13 \geq 200ms$


## 7.0 ELECTRO-OPTICAL CHARACTERISTICS

ITEM		SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
Panel Transmittance		T	$\theta = 0^\circ$	3.9	4.2	--	%	
Luminance		L	$\theta = 0^\circ$	200	220	--	cd/m <sup>2</sup>	Note1
Luminance Uniformity		YU	9points	75	80	--	%	Note5
Contrast Ratio		CR	Point-5	--	200	--	-	Note3
Response Time		Rr+Tf	Point-5	--	25	--	ms	Note4
Viewing Angle K=Contrast Ratio>10	Horizontal	$\theta L$	CR > 10 $\theta = 0^\circ$	--	70	--		Note2
		$\theta R$		--	70	--		
	Vertical	$\theta U$		--	40	--		
		$\theta D$		--	60	--		
Color Filter Chromaticity	White	X	$\theta = 0^\circ$	0.273	0.313	0.353		Note1
		Y		0.289	0.329	0.369		
	Red	X	$\theta = 0^\circ$	TBD	TBD	TBD		
		Y		TBD	TBD	TBD		
	Green	X	$\theta = 0^\circ$	TBD	TBD	TBD		
		Y		TBD	TBD	TBD		
	Blue	X	$\theta = 0^\circ$	TBD	TBD	TBD		
		Y		TBD	TBD	TBD		


Color gamut ( NTSC ratio )		$\theta = 0^\circ$		TBD		%	
----------------------------	--	--------------------	--	-----	--	---	--

Note1: Measurement Setup

The LCD module should be stabilized at given temperature for 15 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting backlight for 15 minutes in a windless

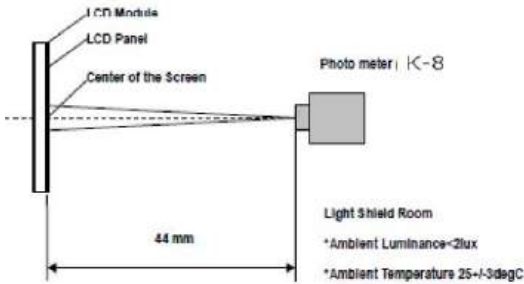

Note2: Definition of Viewing Angle

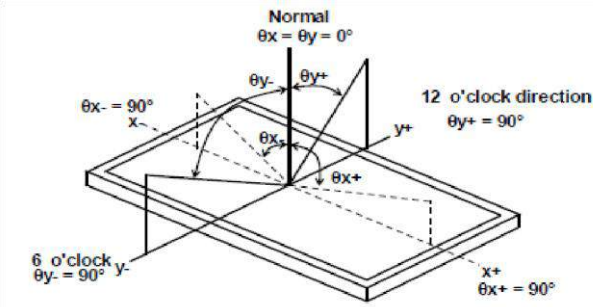


Note3: Definition of Contrast Ratio (CR)

The contrast ratio can be calculated by the following expression

$$\text{Contrast Ratio (CR)} = L63 / L0$$

L63: Luminance of gray level 63, L0: Luminance of gray level 0 Note4:


Definition of Response Time (TR, TF)

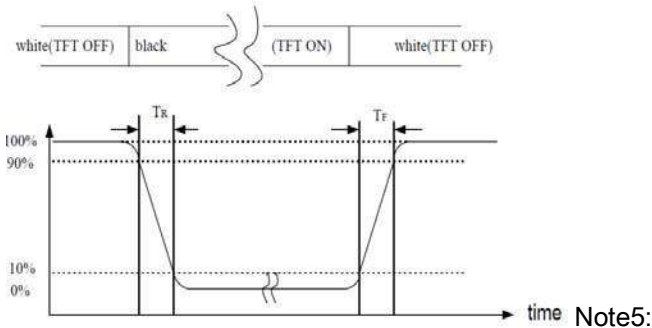

Definition of Luminance Uniformity(Variation)

Measure the luminance of gray of gray level 63 at 1-9 points

$$\Delta L = \left[ \frac{L(\text{MIN})}{L(\text{MAX})} \right] \times 100$$

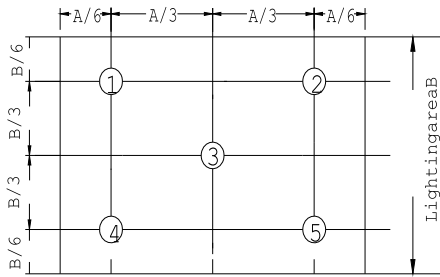

## 8. RELIABILITY

### 8.1 MTBF

The LCD module shall be designed to meet a minimum MTBF value of 50000 hours with normal. (25°C in the room without sunlight)

### 8.2 TESTS

NO.	Test Item	Test condition	Criterion
1	High Temperature Storage	60°C±2°C 96H Restore 2H at 25°C Power off	After testing, cosmetic and electrical defects should not happen.
2	Low Temperature Storage	-10°C±2°C 96H Restore 2H at 25°C Power off	
3	High Temperature Operation	60°C±2°C 96H Restore 2H at 25°C Power on	
4	Low Temperature Operation	0°C±2°C 96H Restore 2H at 25°C Power on	
5	High Temperature & Humidity Operation	60°C±2°C 90%RH 96H Power on	
6	Temperature Cycle	-10°C ↔ 25°C ↔ 60°C 30min 5min 30min after 10cycle, Restore 2H at 25°C Power off	
7	Vibration Test	10Hz~150Hz, 100m/s <sup>2</sup> , 120min	
8	Shock Test	Half-sinewave, 300m/s <sup>2</sup> , 11ms	
9	Drop Test(package state)	800mm, concrete floor, 1corner, 3edges, 6 sides each time	

10	Electro Static Discharge Test (non-operation)	150pF , 330 Ω , Contact: ±4KV,Air: ±8KV Measure point :LCD glass and metal bezel	IEC61000-4-2: 2001 GB/T17626.2-2006
		200pF, 0 Ω , ±200V contact test Measure point :IF connector pins	

## 9.0 INSPECTION STANDARDS

### 9.1 Inspection Conditions

#### 9.1.1 Environmental conditions

The environmental conditions for inspection shall be as follows Room  
temperature:  $20 \pm 3^{\circ}\text{C}$  ; Humidity:  $65 \pm 20\% \text{RH}$

#### 9.1.2 The external visual inspection

With a single 20-watt fluorescent lamp as the light source, the inspection was in the distance of 30cm or more from the LCD to the inspector's eyes .

### 9.2 Classification of defects

#### 9.2.1 Major defect

A major defect refers to a defect that may substantially degrade usability for product applications.

#### 9.2.2 Minor defect

A minor defect refers to a defect which is not considered to be able substantially degrade the product application or a defect that deviates from existing standards almost unrelated to the effective use of the product or its operation.